


SIDE POCKET MANDREL GAUGE CARRIER 1.5"

WITH IGauge5

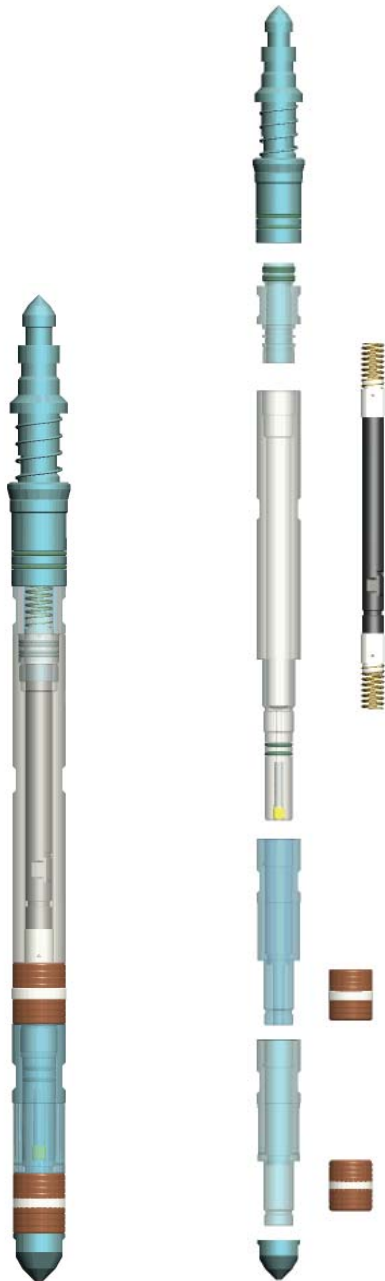

ENHANCED RELIABILITY

Gauge specially protected from shocks and vibrations
Human error reduced thanks to its simplicity
Low maintenance gauge operated by anyone in less than 10 minutes
Complete package can be sent at the well-site ready to run (gauges installed and started)
Easily installed / retrieved with standard kick-over tool

METROLOG BREAKTHROUGH

Standard iGauge within a SPM mechanic
Up to 5 months recording
Either tubing or annulus monitoring

APPLICATIONS

Long term monitoring of flowing wells without tubing restriction
For accurate reservoir monitoring and build up up to 5 months
Adapted to standard design gas lift valve

SPECIFICATIONS

SIDE POCKET MANDREL GAUGE 1.5" WITH IGauge5

| | |
|-------------------------------------|-------------------------------------|
| Type of Gauge | iGauge, iGauge2, iGauge5 |
| OD in (mm) | 1.5" (38.1) |
| Weight lb (kg) | 10 (4.5) |
| Latch | BK type |
| Service temperature °F (°C) | 300°F (150°C) |
| Length ft (mm) | 19.6" (497) |
| Number of gauges/ carrying capacity | 1 |
| Gauge OD (mm) | 0.75 (19.05) |
| Pressure range available : | 0-15000 PSI |
| Sour Service | yes |
| Material | APX-4, K Monel |
| V-Packing | Adapted to ported gas lift mandrels |

Metrolog, a Sercel Brand

1110 Avenue l'Occitane, Technoparc, Bât.2, C.S. 17619. 31676 Labège Cedex FRANCE

Telephone: (33) 5 61 34 80 74. Fax: (33) 5 61 20 41 31. E-mail: sales@metrolog.com

www.metrolog.com

Sercel

S.A. au capital de 2 000 000 €. Siège Social: 16 rue de Bel-Air 44470 Carquefou.

378.040.497 R.C.S. Nantes. Code APE 2651B

www.sercel.com

Printed in France. © Sercel 06/13 - Information subject to change without notice. TDS0_042_B